

Thank you for your purchase of our product. The following contains assembly instructions as well as care and maintenance suggestions. Please take a moment to completely read and familiarize yourself with this information. If you have any questions regarding your purchase, please contact us at 1-800-495-9278

1. KEEP AWAY FROM CHILDREN: Never allow children in a work area. Do not allow children to handle this product and any tools or equipment.

2. STORAGE: When not in use, always store in a dry location to resist rust. Always store in a secure location out of the reach of children.

3. USE OF PRODUCT: Never use inappropriate attachments or manipulate this drawer kit in an attempt to exceed this drawer kit's capabilities. Inappropriate use or manipulation can cause serious injury and will void any and all warranties.

4. MAINTAIN WITH CARE: Always keep drawer kit clean and properly assembled for safe and proper performance. Do not expose to corrosive materials.

IMPORTANT!

PLEASE DON'T RETURN THIS PRODUCT TO THE STORE

HAVING PROBLEMS?

INSTALLATION QUESTIONS?

NEED PARTS?

TROUBLESHOOTING?

CONTACT US FIRST Customer Service 1-800-495-9278 Monday-Friday: 8:00 am - 5:00 pm Central Time

WARRANTY:

This product is warranted for one year. If, during normal use, this Xtreme Garage™ product breaks or fails due to a defect in materials or workmanship, simply return it to a Menards® retail store for a free replacement of the same or a similar Xtreme Garage™ product or part. This warranty excludes expendable parts, and normal wear and tear on finishes. This Warranty is void if used in commercial and/or rental purposes, and does not cover any loss to property or injuries to persons or property or related costs. This Warranty does give you specific legal rights, and you may have other rights which vary from state to state.

Parts List

A

Two Drawer Supports

B

Two Drawer Slides

C

Two Cross Supports

D

Two Drawer Sides

E

Two Drawer Fronts

F

One Drawer Bottom

G

Eight Large Screws

H

Eight Large Nuts

I

Eight Small Screws

J

Eight Small Nuts w/Locking Washers

K

Four Beam Brackets
For use with boxed beams

L

Four Self-Tapping Screws
For use with boxed beams

Tools Needed:

Phillips head screw driver

Crescent wrench

Beam Types

Sold Separately

C-Channel Beam

Fully Boxed Beam

Step 1 Assembly

B

1

2

3

Separate the two drawer slides (B) by sliding each drawer slide (B) apart (1) and while pulling up on the black release lever (2) (located inside each drawer slide) separate the slide. When finished you should have 4 separate sections (3).

Step 2 Assembly

J

A

I

B

I

B

J

IMPORTANT: Make sure the bearing slides on the separated drawer slides are towards the FRONT of racking.

Using 4 small screws (I) and 4 small nuts (J) - attach the two separated drawer slides (B) "without black release levers" to the two drawer supports (A). Tighten the 4 small nuts (J) and 4 small screws (I) securely.

Step 3 Assembly

A-B

1

2

Beam

Slide the assembled drawer supports (A-B) onto the inside bottom of the racking beams. Start by sliding the (1) side of (A-B) onto the inside beam edge. Finish by sliding (2) onto the second beam.

Step 4 Assembly

G

C

H

Beam

Attach the two cross supports (C) to the assembled drawer supports using 8 large screws (G) and 8 large nuts (H). Tighten the large screws (G) and large nuts (H) securely.

Step 5 Assembly

I

B

J

D

J

B

I

IMPORTANT: Make sure the black release lever on the separated drawer slides are towards the BACK of racking.

Using 4 small screws (I) and 4 small nuts (J) attach the two separated drawer slides (B) "with black release levers" to the two drawer sides (D). Tighten the 4 small nuts (J) and 4 small screws (I) securely.

Step 6 Assembly

E

D-B

1

2

Attach the two drawer fronts (E) to the drawer sides (D-B) by sliding the drawer front (E) tabs into the holes provided on the drawer sides (D-B). Using a rubber mallet tap on the outside corners of the drawer fronts (E) to secure.

Step 7 Assembly

F

Insert one drawer bottom (F) into the bottom of the drawer assembly.

Step 8 Assembly

Slide the drawer assembly onto the bearing guides located on the assembled drawer supports. Test to make sure the drawer moves smoothly. If necessary, loosen the large screws (G) and large nuts (H) from Step 4 and square up the assembly. Retighten and test the drawer again. Enjoy your new drawer.

PAGE 1

IMPORTANT!

PLEASE DON'T RETURN THIS PRODUCT TO THE STORE



CONTACT US FIRST Customer Service 1-800-495-9278 Monday-Friday: 8:00 am - 5:00 pm Central Time

- HAVING PROBLEMS?
- INSTALLATION QUESTIONS?
- NEED PARTS?
- TROUBLESHOOTING?


Parts List

A Two drawer Supports	B Two Drawer Slides	C Two Cross Supports	D Two Drawer Sides	E Two Drawer Fronts
F One Drawer Bottom	G Eight Large Screws	H Eight Large Nuts	I Eight Small Screws	J Eight Small Nuts w/Locking Washers
K Four Beam Brackets For use with boxed beams	L Four Self-Tapping Screws For use with boxed beams	Tools Needed: • Phillips head screw driver. • Crescent wrench.		

Beam Types


Sold Separately	
C-Channel Beam  View of end of beam Flip instructions over, c-channel beam instructions located on opposite side of owners manual.	Fully Boxed Beam  View of end of beam Continue to Step 1

Step 1 Assembly

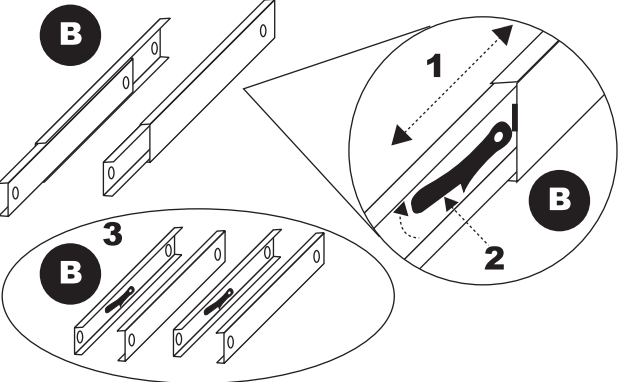

Separate the two drawer slides (B) by sliding each drawer slide (B) apart (1) and while pulling up on the black release lever (2) (located inside each drawer slide) separate the slide. When finished you should have 4 separate sections (3).


Step 2 Assembly

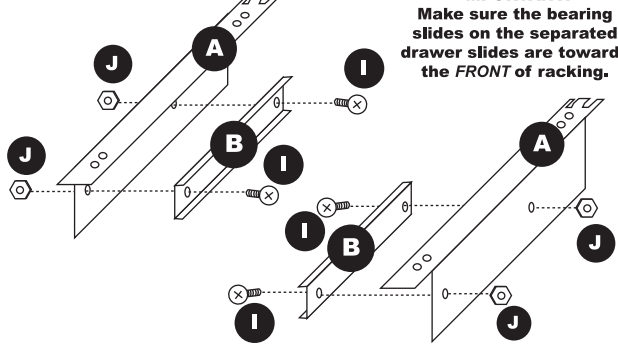

IMPORTANT: Make sure the bearing slides on the separated drawer slides are towards the **FRONT** of racking.


Using 4 small screws (I) and 4 small nuts (J) - attach the two separated drawer slides (B) "without black release levers" to the two drawer supports (A). Tighten the 4 small nuts (J) and 4 small screws (I) securely.

Step 3 Assembly

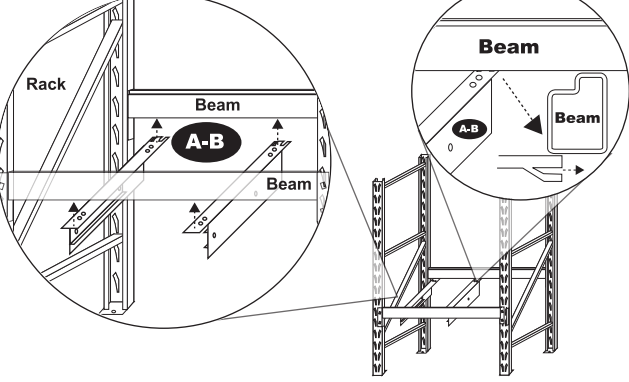


Place the assembled drawer supports (A-B) onto the bottom of the racking beams. This is the position the drawer supports go for a fully boxed beam assembly. Move onto Step 4.

Step 4 Assembly

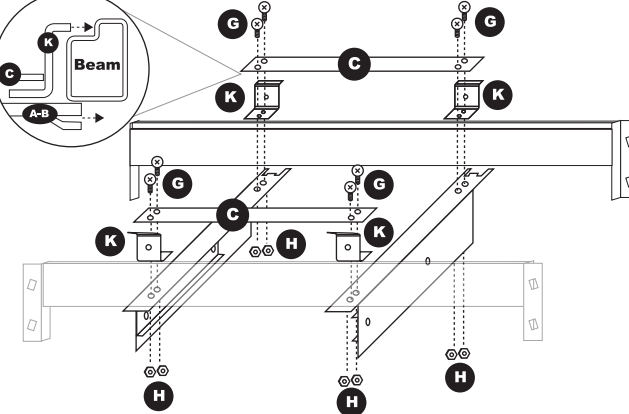


Attach the two cross supports (C) and four beam brackets (K) to the assembled drawer supports using 8 large screws (G) and 8 large nuts (H). Tighten the large screws (G) and large nuts (H) securely.

Step 5 Assembly

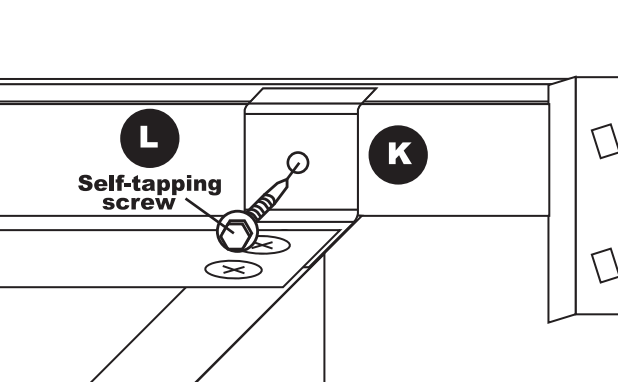

Insert four self tapping screws (L) into the beam brackets (K). Using a wrench or power drill thread the four self tapping screws into the two racking beams. Tighten the four self tapping screws (L) into racking beam to secure.


Step 6 Assembly

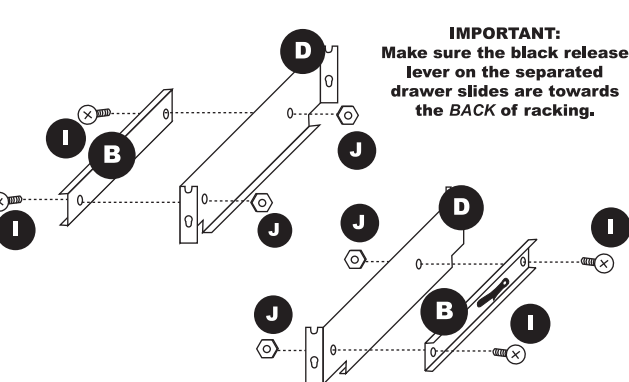

IMPORTANT: Make sure the black release lever on the separated drawer slides are towards the **BACK** of racking.


Using 4 small screws (I) and 4 small nuts (J) attach the two separated drawer slides (B) "with black release levers" to the two drawer sides (D). Tighten the 4 small nuts (J) and 4 small screws (I) securely.

Step 7 Assembly

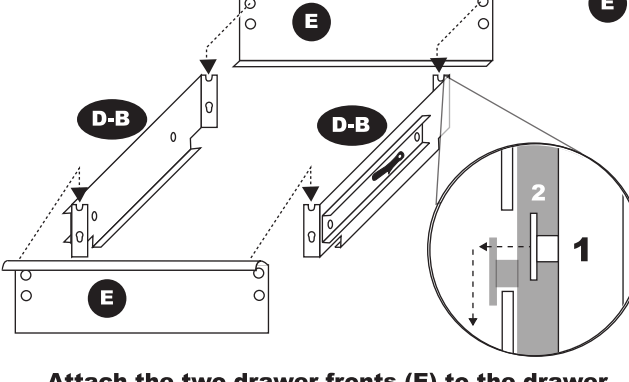


Attach the two drawer fronts (E) to the drawer sides (D-B) by sliding the drawer front (E) tabs into the holes provided on the drawer sides (D-B). Using a rubber mallet, tap on the outside corners of the drawer fronts (E) to secure.

Step 8 Assembly

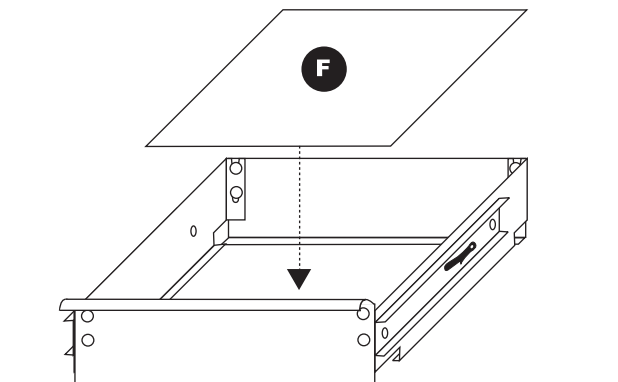

Insert one drawer bottom (F) into the bottom of the drawer assembly.

Step 9 Assembly

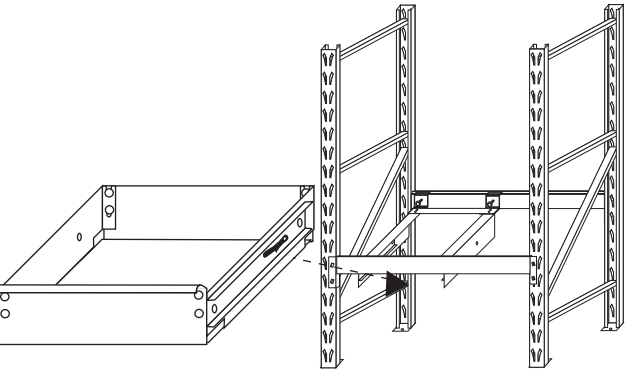

Slide the drawer assembly onto the bearing guides located on the assembled drawer supports. Test to make sure the drawer moves smoothly. If necessary, loosen the large screws (G) and large nuts (H) from Step 4 and square up the assembly. Retighten and test the drawer again. Enjoy your new drawer.